

ColorChrome™ Pigment

TECHNICAL DATA SHEET

DESCRIPTION:

ColorChrome Pigment is a metallic mica pigment designed to be dispersed in a variety of binders to create seamless floors with a unique, three-dimensional appearance. Depending on the application techniques used, the finished floor's appearance can range from elegant to exotic. ColorChrome Pigment is an ideal product for retail establishments, night clubs, automotive showrooms, and residential interiors and garage floors, or any interiors that desire a truly unique finished floor. When combined with the proper binders and finish coats, it can offer an unmatched blend of beauty and durability.

USES:


- Commercial & Residential Applications
- Areas where durable and elegant flooring is desired
- Dining areas
- Restrooms
- Bars & Night Clubs
- Commercial Interiors
- Sporting Venues
- Residential Interiors
- Garage Floors

CHEMICAL COMPOSITION:

Pigmented mica flake.

COLORS:

Available in 20 standard colors.

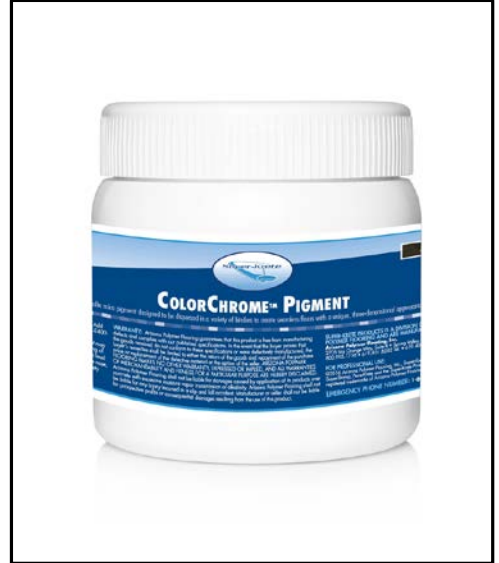

PACKAGING:

- 8 oz. units
- 2 oz. units

MOISTURE VAPOR EMISSIONS PRECAUTIONS:

All interior concrete floors not poured over an effective moisture vapor retarder are subject to possible moisture vapor transmission that may lead to blistering and failure of the coating system. It is the coating applicator's responsibility to conduct calcium chloride and relative humidity probe testing to determine if excessive levels of vapor emissions are present before applying any coatings. Arizona Polymer Flooring can supply moisture remediation products. Consult our technical service department. Arizona Polymer Flooring and its sales agents will not be responsible for coating failures due to undetected moisture vapor emissions.

Super-Krete Products is a Division of Arizona Polymer Flooring, Inc.

© 2016 Arizona Polymer Flooring, Inc.
2705 Via Orange Way Suite B, Spring Valley, CA 91978 USA
800.995.1716 / 619.401.8282 Tel. / 619.401.8288 Fax

www.super-krete.com

ColorChrome™ Pigment

051916



THE CONCRETE OVERLAY EXPERTS™

ColorChrome™ Pigment

TECHNICAL DATA SHEET

TECHNICAL INFORMATION:

Physical Properties

Mixing Ratio, by Weight	8 oz. per 1.5 gallons of resin
Solids Content	100%
V.O.C.	None

LIMITATIONS:

- Exterior applications must be made with a UV-stable binder.

WARRANTY:

Arizona Polymer Flooring guarantees that this product is free from manufacturing defects and complies with our published specifications. In the event that the buyer proves that the goods received do not conform to these specifications or were defectively manufactured, the buyer's remedies shall be limited to either the return of the goods and repayment of the purchase price or replacement of the defective material at the option of the seller. ARIZONA POLYMER FLOORING MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, AND ALL WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED. Arizona Polymer Flooring shall not be liable for damages caused by application of its products over concrete with excessive moisture vapor transmission or alkalinity. Arizona Polymer Flooring shall not be liable for any injury incurred in a slip and fall accident. Manufacturer or seller shall not be liable for prospective profits or consequential damages resulting from the use of this product.

Super-Krete Products is a Division of Arizona Polymer Flooring, Inc.

© 2016 Arizona Polymer Flooring, Inc.
2705 Via Orange Way Suite B, Spring Valley, CA 91978 USA
800.995.1716 / 619.401.8282 Tel. / 619.401.8288 Fax

www.super-krete.com

ColorChrome™ Pigment

051916



THE CONCRETE OVERLAY EXPERTS™